


Dri-Air Control options – Dri-Air has a complete range of control options from Touch Screen controls with blending and loading functions to entry level ELC controls



Mobile Ready! Dri-Touch controllers interface with Dri-Link mobile App. Available for both IOS and Android

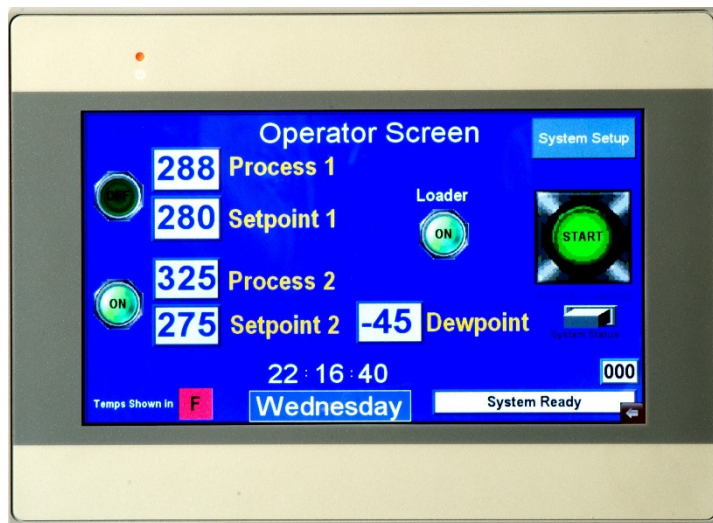

ADC Control



ELC control includes temperature alarms



Phone: 860-627-5110
 email: sales@dri-air.com
 16 Thompson Road
 East Windsor, CT 06088

Versatility

Standard on our E-Plus series dryers, and optional on the HP series. The Dri-Touch controller is available in two sizes, 4.3 and 7". Both are full color with easy to use prompts for temperature, time and dewpoint display. Other features include:

- 49 F dewpoint monitor
- 7 day timer for automatic start and stops
- Diagnostic functions with troubleshooting tips
- Resin Library
- Ethernet Ready

You can also communicate and control dryer functions with Dri-Link iPad / iPhone interface (android also available)

Blending Control

The Dri-Touch Screen also serves as the blending control for our on demand blending systems. This provides you with easy to use settings of regrind and colorant percentages

Loading Control

Controls for hopper and press loading are easy to set for fill times, dump times and alarms – no need to scroll through endless screens to find the information you need!

ADC Controls

- 49 F dewpoint monitor
- High temp alarm & shutdown
- 7 day timer
- Alarm history
- Thermocouple alarms

Our proven, time tested ADC control is standard on our HP dryers and includes:

Spike Free Regeneration

Both our Dri-Touch and ADC controls feature temperature controlled regeneration. Thermocouples in the desiccant tower monitor and adjust the regeneration cycle, changing regeneration parameters as conditions change – the net result is substantial energy savings (up to 50% less than wheel dryers) and spike free bed changeovers !